


MIRAGE

Performance fabrics



ARCHITECTS SPECIFIERS CONTRACTORS

A19

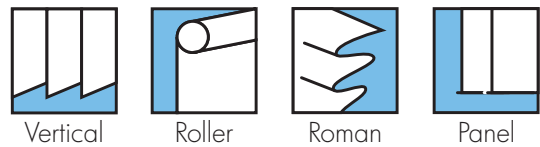


SOLAR, OPTICAL AND COLOUR FASTNESS PROPERTIES

MIRAGE	SOLAR, OPTICAL PERFORMANCE CHART													
	SOLAR			OPTICAL			SC	CF	DIM out	UV block	SG	DG	G TOT	
T _s	R _s	A _s	T _o	R _o	A _o	TG							LE	
Cream	22	62	16	18	62	20	0.40	6+	2	100	0.301	0.314	0.329	0.366
Latte	24	48	28	15	44	41	0.53	6	3	100	0.417	0.421	0.420	0.460
Stone	18	63	19	11	66	23	0.39	6	3	100	0.318	0.335	0.350	0.388
White	19	74	7	16	83	1	0.28	6+	2	100	0.253	0.272	0.292	0.330

T: % Transmittance R: % Reflectance A: % Absorption SC: Shading Co-efficient CF: Colour Fastness Dim out: 1= High light penetration, 4= Low light penetration, 5= Blackout UV Block: the percentage of UV light blocked by the fabric GTOT: SG = Single Glazed, DG = Double Glazed, TG = Triple Glazed, DG LE = Double Glazed Low Emissivity.

SHADING CO-EFFICIENT

The solar heat gain with the blind at the window divided by the solar heat gain with no blind at the window. The lower the shading co-efficient, therefore, the higher the efficiency of the fabric. The test results in the table above have been achieved using a single 6mm glass glazing system.

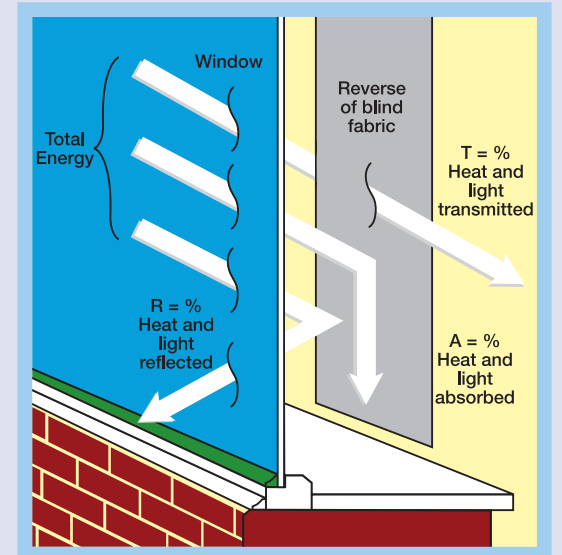

FIRE PROTECTION

Mirage meets FR standard BS 5867 Part 2 Type B. Further information is available on request.

Blinds with Louvolite Performance fabrics can be supplied by:

CI/SfB 1976 reference by SfB Agency			
(76.7)	X		

MIRAGE

Performance Fabrics

CONTRACTORS

SPECIFIERS

ARCHITECTS



white



cream



stone



latte



vertical blind



roller blind



panel blind



roman blind



machine washable
(vertical blind fabrics only)



wipe clean



Greenshield



COLOUR RANGE	4
LOUVRE WIDTHS AVAILABLE	89mm (3½") 127mm (5") other widths available on request
ROMAN/ROLLER BLIND WIDTH	1.83m (72")
FABRIC COMPOSITION	100% polyester
FABRIC WEIGHTS	160g/m ² (4.7oz/yd ²)
FLAMMABILITY STANDARDS	Complies with BS 5867 (Part 2, Type B)
COLOUR FASTNESS	Tested in accordance with BS EN ISO 105-B01:1999

GREENSHIELD:	Fabrics featuring the Greenshield mark have been tested to confirm no harmful VOC's or hazardous substances will be released to the environment in quantities that are recognised as potentially dangerous to occupants of dwellings or buildings.
CLEANING:	Machine washable (vertical blind fabrics only) See manufacturer's instructions tested in accordance with BS EN 26330:1994 method 7a
G TOT	A measure of total solar energy that passes through the glazing system and the blind fabric.
AVAILABILITY	Ex-stock
FABRIC SAMPLES	Available on request

Colours reproduced here may vary from the actual colours due to the limitations of the printing process. Great care has been taken to ensure that the fabric swatches and the information supplied are correct, however specifiers and customers are advised to check the suitability of materials before use.