

TRIBUNE®

Performance Fabrics

incorporating Cold Coat Technology®



ARCHITECTS SPECIFIERS CONTRACTORS

A3



Vertical




SOLAR, OPTICAL AND COLOUR FASTNESS PROPERTIES

TRIBUNE®	SOLAR, OPTICAL PERFORMANCE CHART													
	SOLAR			OPTICAL			SC	CF	DIM out	UV block	SG	DG	G TOT	
T _s	R _s	A _s	T _o	R _o	A _o	TG							LE	
Beige	21	59	20	16	58	26	0.43	5/6	2	99	0.351	0.364	0.374	0.413
Calico	17	69	14	14	73	13	0.33	6+	3	100	0.281	0.304	0.324	0.362
Caramel	15	53	32	6	45	49	0.48	6	3	100	0.367	0.387	0.397	0.438
Flint	19	55	26	11	47	42	0.46	5/6	3	98	0.369	0.386	0.394	0.435
Midnight	9	27	64	0	6	94	0.73	6+	4	100	0.478	0.502	0.491	0.545
White	20	73	7	20	79	1	0.29	6+	2	100	0.266	0.284	0.304	0.341

T: % Transmittance R: % Reflectance A: % Absorption SC: Shading Co-efficient CF: Colour Fastness Dim out: 1= High light penetration, 4= Low light penetration, 5= Blackout
 UV Block: the percentage of UV light blocked by the fabric GTOT: SG = Single Glazed, DG = Double Glazed, TG = Triple Glazed, DG LE = Double Glazed Low Emissivity.

SHADING CO-EFFICIENT

The solar heat gain with the blind at the window divided by the solar heat gain with no blind at the window. The lower the shading co-efficient, therefore, the higher the efficiency of the fabric. The test results in the table above have been achieved using a single 6mm glass glazing system.

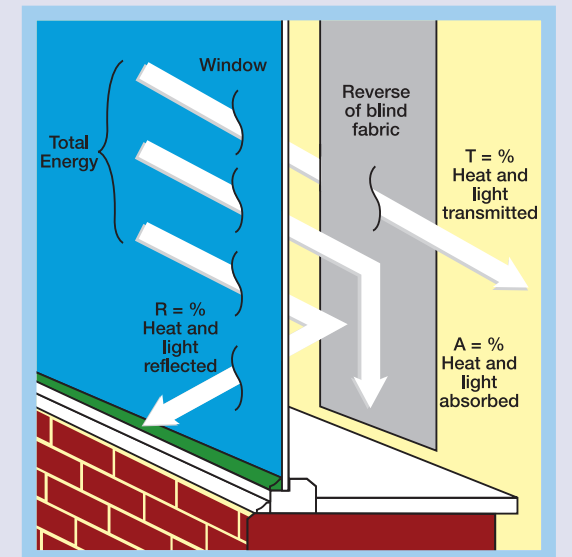


FIRE PROTECTION

Tribune meets FR standard BS 5867 Part 2 Type B. Further information is available on request.

Blinds with Louvolite Performance fabrics supplied by:




CI/SfB 1976 reference by SfB Agency		
(76.7)	X	

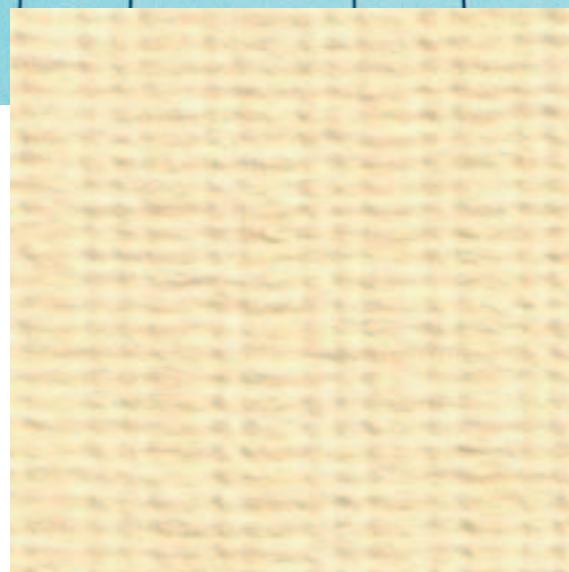

calico



white




beige



caramel



flint



midnight



vertical blind



flame retardant



wipe clean



machine washable




Greenshield



Ultra Fresh* Ultra-Fresh is a registered trademark of Thomson Research Associates, Canada.



COLOUR RANGE	6
LOUVRE WIDTHS AVAILABLE	89mm (3½") 127mm (5") other widths available on request
FABRIC COMPOSITION	100% polyester
FABRIC WEIGHTS	265g/m² (7.8oz/yd²)
FLAMMABILITY STANDARDS	Complies with BS 5867 (Part 2, Type B)
COLOUR FASTNESS	Tested in accordance with BS EN ISO 105-B01:1999
ULTRA-FRESH*	 An Ultra-Fresh* treated fabric that kills MRSA on contact. Also contains effective antibacterial and antifungal properties to preserve fabric freshness.
COLD COAT TECHNOLOGY	Improved performance against total transmitted and radiated heat.

GREENSHIELD:	Fabrics featuring the Greenshield mark have been tested to confirm no harmful VOC's or hazardous substances will be released to the environment in quantities that are recognised as potentially dangerous to occupants of dwellings or buildings.
CLEANING:	Machine washable See manufacturer's instructions tested in accordance with BS EN 26330:1994 method 7a
G TOT	A measure of total solar energy that passes through the glazing system and the blind fabric.
AVAILABILITY	Ex-stock
FABRIC SAMPLES	Available on request

Colours reproduced here may vary from the actual colours due to the limitations of the printing process. Great care has been taken to ensure that the fabric swatches and the information supplied are correct, however specifiers and customers are advised to check the suitability of materials before use.